

YONGNUO




广 角 定 焦 镜 头

YN35mm F2CR
WIDE-ANGLE PRIME LENS

使用说明书

感谢您购买永诺产品！

在使用本产品前，请务必先仔细阅读本手册，以确保您能正确、安全使用。请妥善保管好本手册，以便日后能随时查阅。

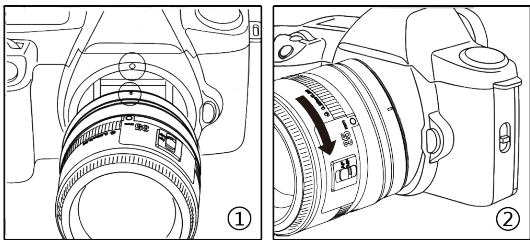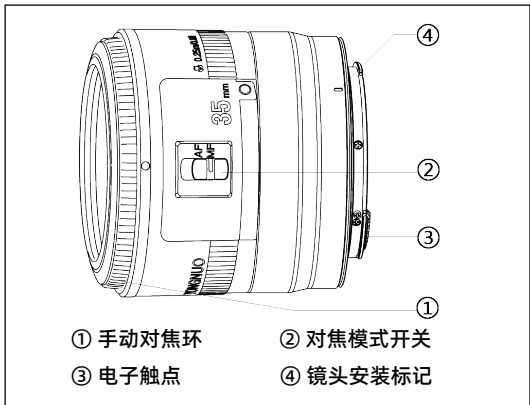

安全注意事项

- 请勿透过镜头或相机观看太阳或明亮的光源，否则会使视力受损。
- 无论镜头是否装在相机上，请勿将没有盖镜头盖的镜头置于太阳下，否则镜头可能汇聚光线并引发火灾。不使用时请盖上镜头盖。
- 请将镜头放置在儿童接触不到的地方。
- 请勿自行拆开或改造镜头。

安装与卸下镜头

详细安装及卸下镜头的步骤请参阅相机使用说明书。

安装镜头

将镜头上的红色安装标志对准相机上的相同安装标志，然后以顺时针

方向旋转镜头，直到听到“咔”的一声为止。

卸下镜头

按下相机上的镜头释放按钮，逆时针方向转动镜头直至停止，然后卸下镜头。

* 卸下镜头后，请将镜头后端朝上放置，以避免划伤镜头表面和电子触点。如果电子触点被弄脏或沾有指纹，请用柔软的布将其擦净。

* 取下镜头时，需要装上防尘盖。请正确安装防尘盖:将防尘盖上的安

装标记对准镜头上的相同安装标记，朝顺时针方向旋转。要取下镜头盖则朝逆时针方向旋转。

对焦模式

自动对焦 (AF): 将对焦模式开关设置为AF, 然后半按快门进行对焦。

手动对焦 (MF): 将对焦模式开关设为MF, 然后手动转动对焦环进行对焦。

* 镜头未安装到相机上或相机关机时，不能调整对焦。

滤光镜(需另购)

可在镜头前端的螺纹上安装一个直径52mm的滤光镜。

* 每次只能安装一个滤光镜。

保养及存放注意事项

- 应避免撞击或直接放置在酷热、极冷或潮湿的环境下。
- 如果长期存放，请选择阴凉干爽及通风良好的地方。建议远离防虫丸或防虫丸发出气体的地方，以保护镜头的镀膜层。
- 镜片上的污垢或者指纹可用柔软微湿的镜头布或镜头纸清洁，切勿使用溶剂、苯或其他有机清洁剂。

· 本镜头并不防水，下雨或者接近水源使用时须特别小心，切勿弄湿。倘若内部机件、镜片及电子零件因弄湿受损，很可能无法维修。

· 温度突变可能会令镜头表面凝结雾气或水珠，因此在天气寒冷时进入暖和的室内环境，最好将镜头放在密封的塑胶袋内，直至镜头温度接近室温为止。将镜头从温暖的环境拿到寒冷的环境中时，也请使用同样的方法。

故障排除

1. 手动对焦时已经调至最清晰，但成像依然是模糊的

请检查镜头两端镜片是否存在指纹或污垢，如果存在请使用柔软微湿的镜头布或擦镜纸擦拭干净。

2. 镜头装相机上通信异常

请确保镜头安装到位；请检查镜头触点和相机触点是否被弄脏或划伤，如果被弄脏请用柔软的布将其擦净，如果被划伤请返厂维修。

3. 其他异常情况

请尝试关闭相机电源并取出相机电池，然后装回电池再重启电源试试。如果仍有异常，请

致电：永诺售后服务中心400-001-3888或

发送邮件至service@hkyongnuo.com进行咨询。

规格

镜头焦距		35mm
视角范围	对角线	63°
	垂直	38°
	水平	54°
卡口		多规格卡口
画幅		全画幅
镜头结构		5组7片
光圈叶片		7
最小光圈		F/22
最近对焦距离		0.25米
最大放大倍率		0.23倍
滤光镜直径		52毫米/l
最大直径及长度（不含镜头盖）		约Φ73x75mm
重量（不含镜头盖）		约216g

* 镜头长度是指从安装面到镜头前端的距离。

* 除特别说明外，尺寸和重量只适用于镜头。

* 光圈设置可以由相机指定。

本说明书最新电子版可在网站
<https://www.hkyongnuo.com/xzyzc>获取。
本使用说明书中的功能及数据均是依据本公司的测试条件获得。
设计和规格如有变更，恕不另行通知。

制造商: 深圳市永诺电器有限公司
制造商地址: 深圳市坪山区坑梓街道秀新社区锦绣东路14号A1栋209 A座A2栋2-5楼
电话: (86)0755-3300 1023 售后电话: 400-001-3888
网址: www.hkyongnuo.com 售后邮箱: service@hkyongnuo.com
招商邮箱: sales@hkyongnuo.com
社交平台请搜索: YONGNUO永诺



YONGNUO

YN35mm F2CR
WIDE-ANGLE PRIME LENS

USER MANUAL

Thank you for purchasing YONGNUO product!

Before using the product, please read the instruction manual carefully to ensure that you use the product properly. Please keep the manual properly for future reference.

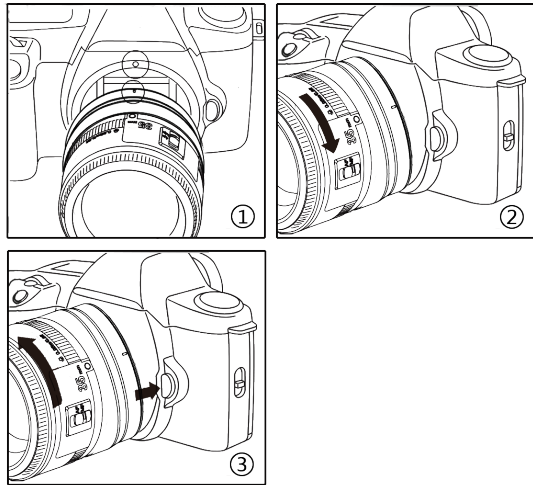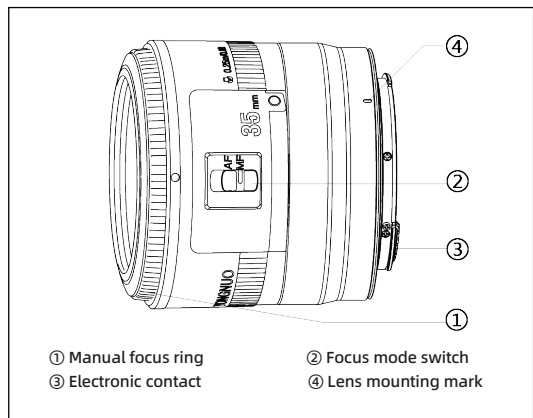

Safety Precautions

- Please do not look at the sun or bright light source through the lens or camera, otherwise it might cause visual impairment.
- Whether the lens is mounted on the camera or not, please do not place the lens under the sun without lens cap covered,otherwise the lens might gather light and cause a fire.Please cover the lens with lens cap when not in use.
- Please keep the lens out of reach from children.
- Please do not disassemble or modify this product.

Mounting and Detaching the Lens

For details on mounting and detaching the lens,please refer to your camera's user manual.

Mounting the Lens

Please align the red mounting mark on the lens with the same mounting mark on the camera,then rotate the lens clockwise until 'click' is heard.

Detaching the Lens

Press the lens release button on the camera,rotate the lens anticlockwise until stop,then detach the lens.

- * After detaching the lens, please place the lens with the rear end up to prevent lens and electronic contact from getting scratched. If the electronic contact get dirty or contaminated with fingerprints, please clean them with soft cloth.

- * When detaching the lens, please cover it with dust cap. Please mount the dust cap properly : align the mounting mark on the dust cap with the same mounting mark on the lens,then rotate clockwise. If you need to detach the lens cap, rotate it anticlockwise.

Focus Mode

Auto-focus (AF): Set the focus mode switch to AF, then half press the shutter AF.

Manual focus (MF) : Set the focus mode switch to MF, then turn the focusing ring to focus in the manual.

- * Focus hold button function settings need to be supported by the camera, please refer to the camera manual for details.

Filters (Sold Separately)

You can attach a filter in 52mm diameter to the filter mounting thread on the front of the lens.

- * Only one filter can be attached each time.

Maintenance and Storage Precautions

- Please avoid collision or placing the lens directly in extremely hot,cold and humid environment.
- For long storage. please choose a cool, dry and well ventilated place. Please keep away from pest control pills or places where the pest control pills give off gas, to protect the lens coating.
- For cleaning the dirt or fingerprint; you can use soft and slightly wet lens cleaning cloth or lens paper,please do not use solvents, benzene or other organic cleaners.
- This lens is not water-proof, please be careful when it rains or being placed near water source,please do not get it wet. If the inner parts, lens or electronic parts get damaged by damp, it may be unable to repair.
- Temperature jump may result in condensation of mist and water-beads, therefore,when you get in a warm indoor environment in cold weather you had better put the lens in sealed plastic bag to wait until the lens temperature is close to room temperature.Please do the same when the lens is taken from warm to cold environment.

Troubleshooting

1. In manual focus, the image quality is adjusted to the clearest, but the image is still blurry.

Please check if there are fingerprints or dirt on the front and rear lens, if yes, please use soft and slightly wet lens cloth or lens paper to wipe up.

2. Communication error when lens is mounted on camera

Please make sure the lens is mounted properly;Please check if the lens contacts and camera contacts are soiled or scratched, if it is soiled, please use soft cloth to wipe up,if it is scratched,please return for repair.

3. Other problems

Please try turning off the camera and taking out the camera battery, then put back the battery,try rebooting the camera.If problems still exist, please contact after-sale service center at **400-001-3888** or email to **service@hkyongnuo.com** for enquiry.

Specification

Focal Length		35mm
Angle of view	Diagonal	63°
	Vertical	38°
	Horizontal	54°
Lens Mount	Multiple specification	
Lens Frame	Full Frame	
Lens Construction	7 elements in 5 groups	
Aperture Blades	7	
Minimum Aperture	F/22	
Minimum Focusing Distance	0.25m	
Maximum Magnification	0.23x	
Filter Diameter	52mm/l	
Max.Diameter x Length (Not including front and rear lens cap)	About Φ73x75mm	
Weight (Not including front and rear lens cap)	About 216g	

- * The lens length refers to the distance from the mounting side to the lens front end.
- * Unless special stated, the dimension and weight is only suitable for the lens.
- * The aperture setting can be specified by the camera.

The electronic edition of this user manual can be acquired from <https://www.hkyongnuo.com/xzyzc>.

The function and data listed in this manual are acquired according to YONGNUO testing conditions . The design and specification are subject to change without notice.

Manufacturer: Shenzhen YONGNUO Electronic Equipment Co., Ltd.

Manufacturer Address: Room 209 Building A1&F/2-5,
Building A2,Block A, No.14 Jinxiu East Road,
Xiuxin Community, Kengzi Street, Pingshan District, Shenzhen

Tel: (86)0755-3300 1023

After-Sale Service Email: service@hkyongnuo.com

Business Email: sales@hkyongnuo.com

Web: www.hkyongnuo.com

Search for Social Platforms: [Yongnuo Photography](#) [YONGNUO Users Group](#)