


YONGNUO

YNFLEX180

摄像机灯
Pro LED Video Light

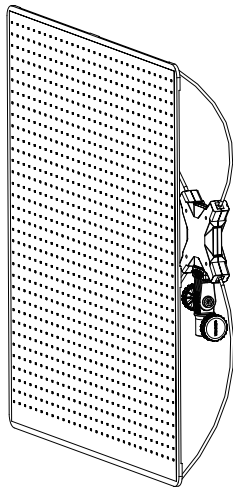

使用说明书 User Manual

前言

感谢您使用YNFLEX180摄像灯，在使用产品前，请认真阅读使用说明书。

注意事项



- 严禁将产品靠近或者投入火源，以避免发生火灾及爆炸等危险。
- 请勿私自拆卸产品，如产品出现故障须本公司或授权维修人员处理。
- 本产品运行时，勿遮挡散热孔，请勿长时间直视光线。
- 请勿在易燃易爆和暴露在雨中使用。

产品规格

光源	1020颗贴片灯			
色温	2500K-7000K			
输出功率	LED:180W			
照度	距离	0.5M	1M	2M
	双色4000K	17843Lux	6148Lux	1906Lux
含包装重量	约4855克		摄像灯重量	约2019克
外接电池	26V/7A；14.8V/6A-V口电池接口（转接线需另购）			
外接电源	DC 24V/7.5A			
包装尺寸	800*140*280毫米	摄像灯尺寸	722*203*730毫米	
遥控距离	小于15米			
平均寿命	50000小时			
光照角度	110°			
所含物品：摄像灯（1）、电源适配器(1)、收纳包（1）、反光板（1）、蜂巢格栅(1)、柔光布(1)、撑杆座（1）、撑杆（4）、调节支架（1）、说明书(1) 注：如有缺失请与经销商联系。				

注：使用14.8v的V扣电池时，最大功率限制为80w。使用26v的V扣电池时，最大功率限制为180w。

产品结构

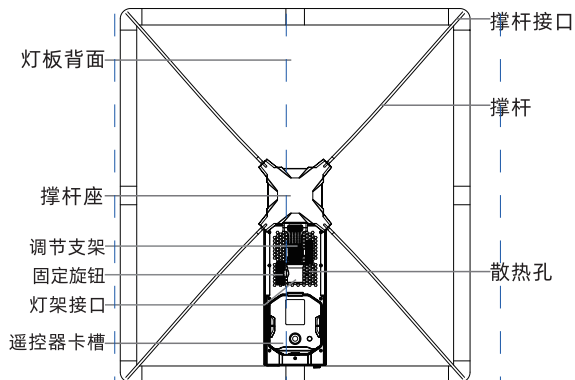

遥控器结构




安装与使用

1.1 安装YNFLEX180。


第一步: 将撑杆座与调节支架连接。

第二步: 将撑杆插入撑杆座的四个固定位置。

第三步: 将撑杆插入布灯的对角, 撑起YNFLEX180 进行使用。

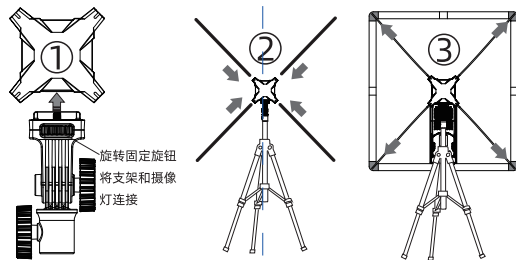


1.2 使用配置电源适配器供电。

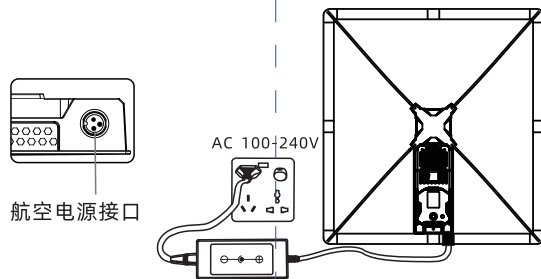

2、开机与关机。

按下电源开关进行开、关机，遥控器开关机键控制亮灯或灭灯。

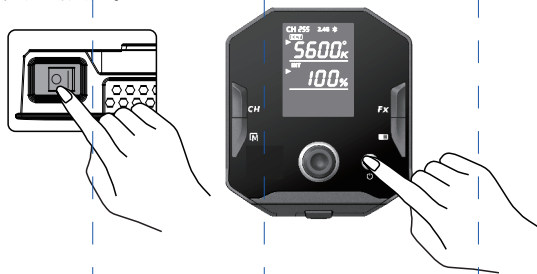

3、色温与亮度调节。


按下开机键摄像灯点亮,按下旋钮切换色温与亮度调节选项,旋转旋钮调节参数。



4、使用遥控器远程控制


按下遥控器锁扣取下遥控器，安装电池后即可远程控制摄像灯。长按关机键遥控器关机。

(注：取下遥控器时需要给遥控器安装两个AA（5号）电池，电池需另购)

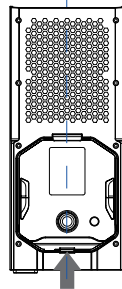

5、切换频道。

按下<CH>按钮旋转确认键选择频道[CH]菜单，按下确认键旋转旋钮调节到您所需要的频道；按下确认键完成切换。（注：产品分为256个频道）




6、特效模式。

按下<Fx>按钮进入特效模式，按确认键切换特效模式、速度、亮度选项，旋转调节参数；再次按下<Fx>按钮暂停。按下<M>切换到色温模式。



7、反光板配件的使用。

- 1)，使用反光板魔术贴与布灯背面魔术贴粘合。
- 2)，将柔光布粘合在反光板内侧魔术贴位置。
- 3)，将蜂巢格栅粘合在反光板外侧魔术贴位置。

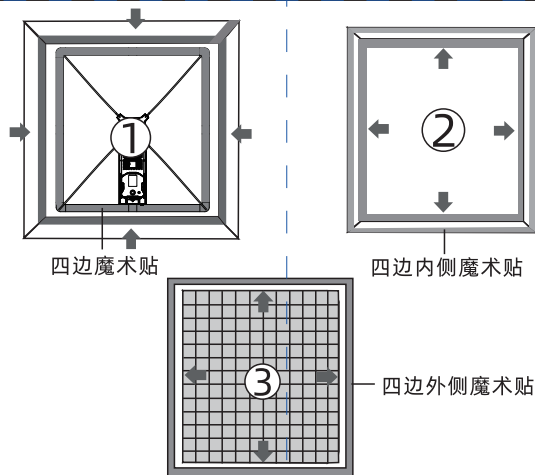

8、手机APP与遥控器无线控制使用。

- 1) .按下<☰>按钮旋转确认键选择蓝牙<📶>，按下确认键开启蓝牙；此时打开手机APP就可以自动连接摄像灯实现无线控制。
 - 2) .2.4G无线控制模式可关闭。
 - 3) .APP可以从永诺官网下载或通过扫描彩盒二维码点击下载。
- 注：不与永诺旧款（频道只有H1-H8）LED摄像灯产品在同一频道使用时，推荐使用H9-H255中的任意频道，以获得更顺畅的无线控制体验。



蓝牙 OFF



蓝牙 ON



2.4G OFF



2.4G ON

本手册中的功能是依据本公司的测试条件获得，设计和规格如有变更，恕不另行通知。

深圳市永诺摄影器材股份有限公司

地址：深圳市坪山区坑梓街道深福保现代光学厂区A座

电话：（86）0755-83762448

传真：（86）0755-83762765

网址：www.hkyongnuo.com

生产地址：深圳市坪山新区坑梓街道锦绣中路14号

深福保现代光学厂区A栋厂房

售后电话：400-001-3888

Introduction

Thank you for using YNFLEX180 LED video light. Please read the manual carefully before you use it.

Precautions



- Do not put the product close to or throw it into the fire source to avoid the danger of fire and explosion.
- Do not disassemble the product, maintenance or repair of this product should be handled by technical maintenance personnel of our company or authorized technical maintenance personnel.
- When this product is running, please do not shield heat emission hole or look straight at the light for a long time.
- Do not use this product in flammable and explosive place, or where it can be exposed to moisture.

Product specification

Color temperature version	1020 SMD lamp beads			
Light Source	Bi-color:2500k-7000k			
Output power	LED:180W			
100% illumination	Distance	0.5M	1M	2M
	Bi-color 4000K	17843Lux	6148Lux	1906Lux
Package Weight	Approx 4855g		Product Net Weight	Approx 2019g
Compatible batteries	26V/7A ; 14.8V/6A V-lock battery interface (adapter cord sold separately)			
External power source	DC 24V/7.5A			
Package Dimensions	800*140*280MM		Product Net Size	722*203*730MM
Control distance	<15M			
Average Service Life	50000H			
Luminance Angle	110°			
Items contained: Video light(1)、Power adapter (1)、Softbox(1)、Reflector(1)、Honeycomb Grid(1) Soft light cloth(1)、Supporting Rod Base (1)、Supporting Rod(4)、Adjusting Bracket(1)、User manual(1) Note: Please contact your dealer if anything missing.				

Note: When using V-lock battery with 14.8V, the peak-power limitation is 80W. When using V-lock battery with 26V, the peak-power limitation is 180W.

Product structure

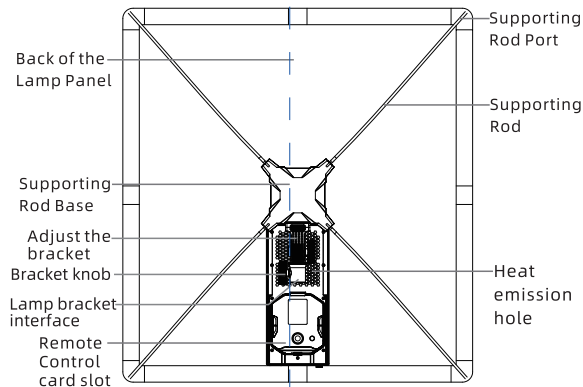

Remote Controller Structure




Installation and use

1.1 Installing YNFLEX180


Step 1: Connect the supporting rod and the adjusting bracket.

Step 2: Insert the supporting rods into the 4 fixed positions of the supporting rod base.

Step 3: Insert the supporting rods into the 4 opposing corners of the cloth lamp to hold up the YNFLEX180 for use.

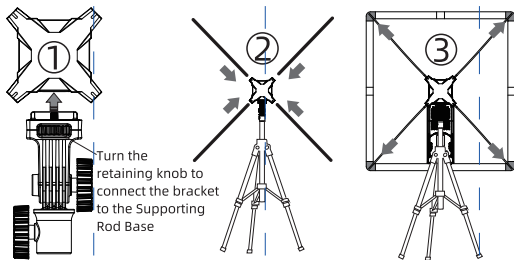


1.2 Use the configured power adapter for power supply.

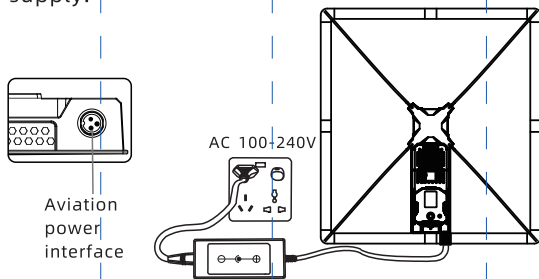

2. Power ON or OFF

Press the power switch to power on or off the LED light, press the ON/OFF key on the remote control to turn on or off the LED light.

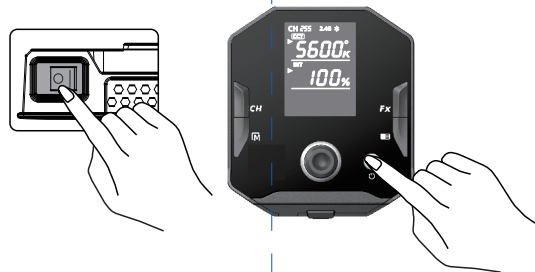


3. Color temperature and brightness adjustment
Press the power button to turn on the light, and press the knob to switch the color temperature and brightness options, rotate the knob to adjust the parameters.




4. Remote control

Press the lock button of the remote control to remove the remote control. After installing the battery, you can remotely control the video light. Long press the shutdown button to turn off the remote control. (Note: When using the remote control, two AA (No. 5) batteries should be installed on the remote control. The batteries need to be purchased separately.)



5. Switch channels

Press the button <CH> and toggle the confirm button to select the channel [CH] menu, then turn the knob to adjust the channel you want; press OK to complete the switch. (Note: The product provides 256 channels.)



6. Special scene modes

Press the button <Fx> to enter the special scene modes, and turn the knob to switch between modes; press the confirm button to enter the special scene modes, press confirm button again to pause. Press the left knob to switch the speed and brightness options, and turn the knob to adjust the parameters. press <Fx> button again to pause. Press <M> again to switch to the color temperature mode.



Simulated lightning



SOS



The bad light bulb



Film screen reflection



White breathing light



Sunrise



Paparazzi



The explosion



Yellow breathing light



Strobe




Fireworks




Temperature cycle

7. Use of Reflector Accessories


- 1) Stick the magic sticker of the reflector with the magic sticker of the back of the cloth lamp.
- 2) Stick the soft cloth with the magic sticker of the inner side of the reflector.
- 3) Stick the honeycomb grid with the magic sticker of the outside of the reflector.

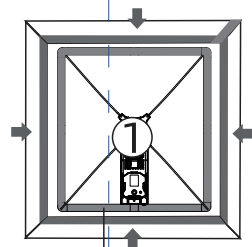

Four-sided Magic Stickers



Four-sided Magic Stickers



Four-sided Magic Stickers

8. Use via mobile APP and remote control for wireless control

- 1) Press the  button  and toggle the OK button to select bluetooth, press OK button to turn on bluetooth; open the mobile APP, at this time the video light is connected automatically to realize wireless control.
- 2) You can purchase YONGNUO L01 touch remote to realize wireless control.

(ON or OFF of 2.4G Wireless Control Mode.)

3) The APP can be downloaded from the YONGNUO official website or scanning the QR code on the gift box.
Note: When this light is not used in the same channel as that of the old series of YONGNUO LED video light products (channels only H1-H8), it is recommended to use any channel from H9 to H255 to get better wireless control experience.



Bluetooth
OFF



Bluetooth
ON



2.4G OFF



2.4G ON

The functions in this manual are based on the test conditions our company. Further notice will not be given if the design and specifications change.